


Glazing in walls enclosing stairway landings or within 60 inches of the top and bottom of stairways where the bottom edge of the glass is less than 60 inches above the walking surface.



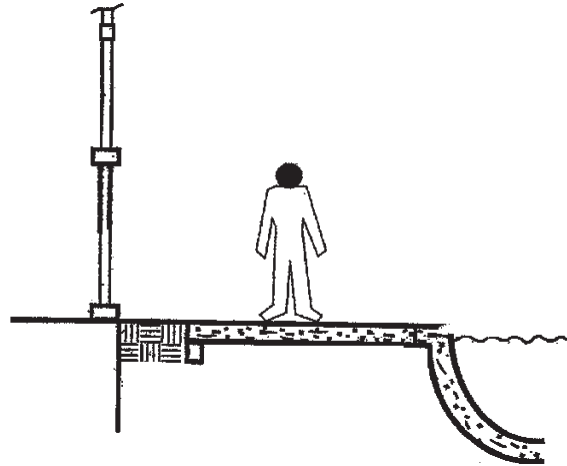


Glazing in walls and fences enclosing indoor and outdoor swimming pools, hot tubs and spas where the bottom edge of the pool or spa side is less than 60 inches above a walking surface and within 60 inches (1524 mm) horizontally of the water's edge. This shall apply to single glazing and all panes in multiple glazing.

INTERNATIONAL RESIDENTIAL CODE (IRC): SAFETY GLAZING IN HAZARDOUS LOCATIONS

COMMON SITUATIONS WHERE SAFETY GLAZING IS REQUIRED

CITY OF IOWA CITY, IOWA

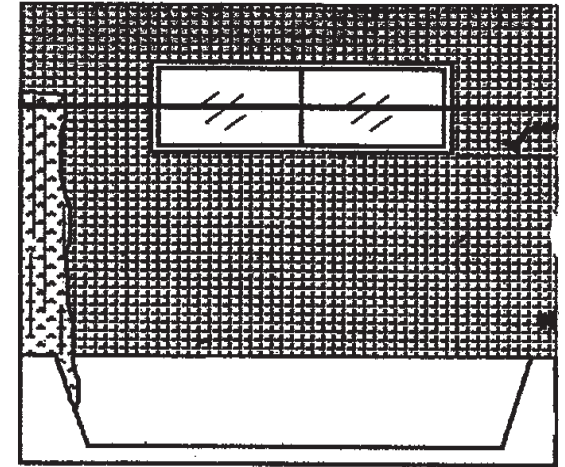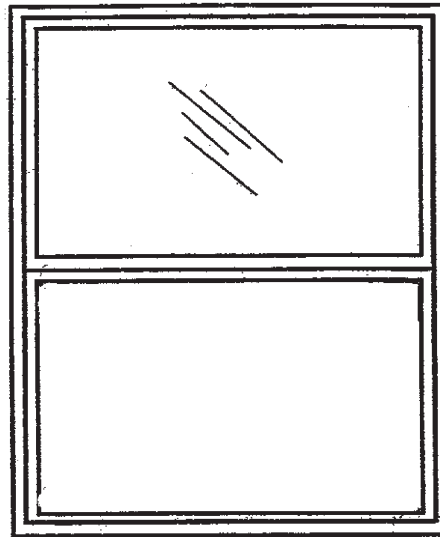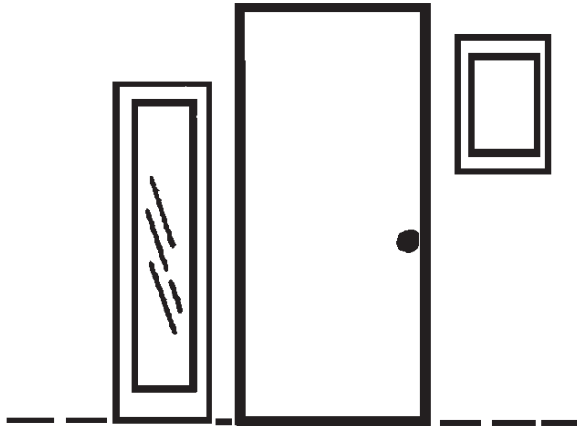

Glazing, in an individual fixed or operable panel adjacent to a door where the nearest vertical edge is within a 24-inch arc of the door in a closed position and whose bottom edge is less than 60 inches above the floor or walking surface.

Exceptions:

1. Glazing located near a door where access through the door is to a closet or storage area 3 feet or less in depth.
2. Glazing where there is an intervening wall or other permanent barrier between the door and the glazing.

Glazing in an individual fixed or operable panel that meets all of the following conditions:

1. Exposed area of an individual pane is greater than 9 square feet.
2. Bottom edge is less than 18 inches above the floor.
3. Top edge is greater than 36 inches above the floor.
4. One or more walking surfaces within 36 inches horizontally of the glazing.

Glazing in doors and enclosures for hot tubs, whirlpools, saunas, steam rooms, bathtubs and showers. Glazing in any part of a building wall enclosing these compartments where the bottom exposed edge of the glazing is less than 60 inches measured vertically above any standing or walking surface.